

# SECTION CORNER RECORD

ND4 & ND5

## VERMILLION COUNTY SURVEYOR'S OFFICE

State Plane grid coordinates NAD83 (2011):

Corner 1: North: 1709861.36 East: 2839021.01 (U.S. survey feet)

Corner 2: North: 1709425.50 East: 2839014.65 (U.S. survey feet)

Type and depth of monument:

Corner 1: Stone, flush

Corner 2: Stone, 2" above grade

Indiana tie card references:

IN02\_T17NR10W09\_80 IN02\_T17NR9W06\_72

IN02\_T17NR10W16\_08 IN02\_T17NR9W07\_00

### CORNER WITNESS DETAIL

SEC. 9, T 17 N, R 10 W

SCALE 1" = 100' 0' 50' 100'

2026000240 SECT COR \$0.00  
02/09/2026 01:24:50P 3 PGS  
Florinda A Pruitt  
Vermillion County Recorder IN  
Recorded as Presented



① S.E. Corner, Section 9  
N.E. Corner, Section 16  
T 17 N, R 10 W  
CORNER REFERENCE: ND4

② S.W. Corner, Section 6  
N.W. Corner, Section 7  
T 17 N, R 9 W  
CORNER REFERENCE: ND5

Distance between  
monuments: 435.9'

① C



pasture

pasture

grid north

A - iron pipe, flush, 5' (to②)  
B - iron pipe, flush, 5' (to②)  
C - rebar with "Clark" cap, flush, 1.2' (to①)  
D - 5/8-inch rebar, flush, 32.2' (to①)  
E - Nail in C/L C.R. 400 N., flush, 218.7' (to①)

SEC. 6, T 17 N, R 9 W


② A



SEC. 7, T 17 N, R 9 W

Eugene Township

Section 9 T17N, R10W	Section 6 T17N, R9W
Section 16 T17N, R10W	Section 7 T17N, R9W



Ronald A. Mack, County Surveyor

J. S. Sct

James S. Swift, IN LS 20200054  
February 6, 2026 Page 1 of 2

# SECTION CORNER RECORD

ND4 & ND5

## VERMILLION COUNTY SURVEYOR'S OFFICE


### Written Documentation Sheet

Please refer to page 1 of 2 for other information.

The stones were found in place and held as marking both corners.

The stone at Corner 1 is shown as the corner on several surveys including surveys by Todd Starr recorded as Instrument 2011001538 and Easton French recorded as Instrument 2024002179, all in the Office of the Vermillion County Recorder. The stone at Corner 2 is shown as the corner on surveys by Dale Francis recorded in Survey Record 1, page 258 and Norman Hiselman recorded as Instrument 2024002089. It is noted that this stone is located at the westerly prolongation of the approximate center of a county road to the east, beginning approximately 900 feet east of the corner and bearing east from there. The Hiselman survey shows the stone at Corner 1 as being 5.3 feet east of the range line. This range line, being the line between Ranges 9 and 10 West, Township 17 North, is an irregular range line. The township to the east was subdivided by surveying in from the east, standard practice in Indiana, while the township to the west was subdivided by surveying in from the west, as part of the field work more associated with surveying in Illinois, than in Indiana. The result is that fractional parts of sections exist on each side of the range line and both of these corners may be considered as closing corners. Standard corners were set in 1819, but those corners were never held as the corner of any sections and have functionally disappeared. The fact that two knowledgeable surveyors, Hiselman and French, treated the range line differently, with a 5-foot east-west variation, on recent surveys which were certified approximately one month apart, speaks to the irregularity of this range line and the confusion associated with attempts by surveyors to sort out which corner to hold as dominant over the other. After careful study of the situation along this range line for several miles to the north and south of these corners, and study of the original federal field notes pertaining to corners along this range line, it is apparent that rigorous adherence to standard approaches is not possible. Neither corner is a standard corner, thus neither corner controls the direction of the range line. We have held the found stones as marking each of the respective corners and hold the short segment of line between them as representing the range line in this immediate vicinity.

The stone at Corner 1 was found witnessed by a rebar with cap stamped WL Clark, S00133 on the northeast edge of the stone. A shallow divot on the top, center of the stone was held as the precise position of the corner. The stone at Corner 2 was found witnessed by iron pipes with caps stamped 2020-0006.



Ronald A. Mack, County Surveyor

A handwritten signature of Ronald A. Mack, County Surveyor.

James S. Swift, IN LS 20200054

February 6, 2026 Page 2 of 2

Eugene Township

Section 9 T17N, R10W	Section 6 T17N, R9W
Section 16 T17N, R10W	Section 7 T17N, R9W

# VERMILLION COUNTY SURVEYOR'S OFFICE

ND4 & ND5

## PHOTOGRAPHIC DOCUMENTATION

Date of photography: April 1, 2025




The stone as found and  
viewed from the South  
(ND4, Corner 1)



Close-up view of stone from above  
(ND4, Corner 1)



The stone as found and  
viewed from the South  
(ND5, Corner 2)

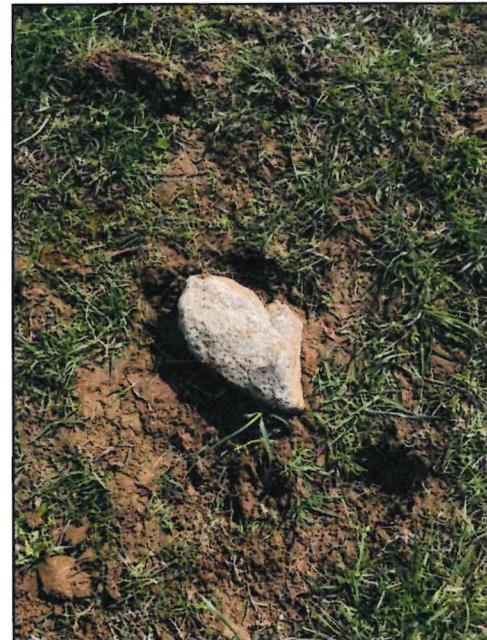

Close-up view of stone from above  
(ND5, Corner 2)

For details and documentation, refer to  
related sheet "Section Corner Record."